


(19)  **Europäisches Patentamt**  
**European Patent Office**  
**Office européen des brevets**



(11) **EP 1 159 921 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**05.12.2001 Bulletin 2001/49**

(51) Int Cl.7: **A61B 17/04**

(21) Application number: **01203181.1**

(22) Date of filing: **08.10.1996**

(84) Designated Contracting States:  
**DE DK ES FI FR GB IT SE**

(72) Inventor: **The designation of the inventor has not yet been filed**

(30) Priority: **09.10.1995 SE 9503512**

(74) Representative: **Fisher, Adrian John et al**  
**CARPMAELS & RANSFORD**  
**43 Bloomsbury Square**  
**London WC1A 2RA (GB)**

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:  
**96935678.1 / 0 854 691**


(71) Applicant: **ETHICON, INC.**  
**Somerville, New Jersey 08876-0151 (US)**

Remarks:

This application was filed on 23 - 08 - 2001 as a divisional application to the application mentioned under INID code 62.

(54) **Surgical instrument for treating female urinary incontinence**

(57) A surgical instrument for treating female urinary incontinence comprises a shank (10) having a handle (11) at one end thereof, and two curved needle-like elements (21A, 21B) which can be connected one at a time with the shank at the other end thereof to form a curved end portion of the shank and are attached at one end thereof each with one end of a netting (26) which is intended to be implanted into the body and is covered by a thin plastic sheath (34).

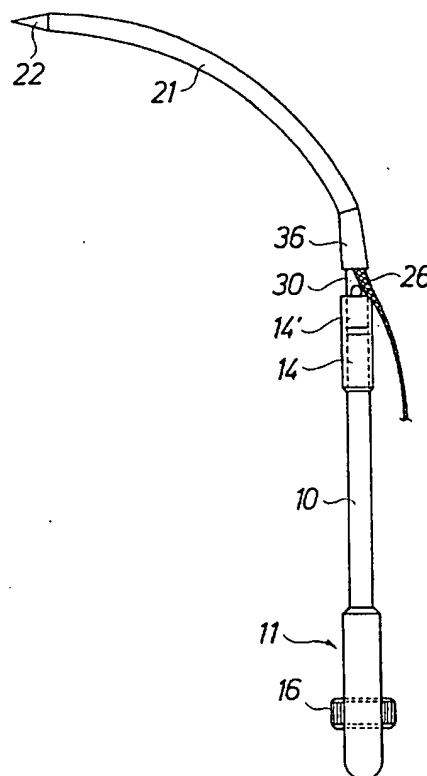

**FIG. 1**

## Description

**[0001]** The invention relates to a surgical instrument for treating female urinary incontinence, of the type described in PCT/SE95/00964 the content of which is incorporated herein by reference, comprising a shank having a handle at one end thereof, and two curved needle-like elements which are each attached at one end thereof to one end of a tape to be implanted into the body, and are constructed to be connected one at the time with the shank to form a curved portion at the other end thereof each element being intended to be passed into the body via the anterior (suburethral) vaginal wall and being dimensioned to extend from the inside surface of the vaginal wall over the back of the pubic bone to the outside of the abdominal wall.

**[0002]** The object of the invention is to further improve the surgical instrument disclosed in said document and for this purpose the instrument of the invention has obtained the characterizing features of claim 1.

**[0003]** The invention will be explained in more detail with reference to the accompanying drawings which disclose the surgical instrument according to the invention and wherein.

FIG. 1 is a side view of the surgical instrument according to the invention,  
 FIG. 2 is a plan view of the surgical instrument,  
 FIG. 3 is an exploded side view of one of the needles and tape and shrinkage hose to be connected with said needle,  
 FIG. 4 is a side view of the needle in FIG. 3 with the tape connected therewith,  
 FIG. 5 is an enlarged fragmentary axial cross sectional view of a coupling of the instrument for connecting an exchangeable needle thereof, and  
 FIG 6 is a side view of two needles and a tape interconnecting said needles.

**[0004]** In the following description the same reference numerals have been used as in PCT/SE85/00964 for corresponding details of the instrument.

**[0005]** The surgical instrument comprises a cylindrical tubular shank 10 having at one end thereof a handle 11. At the other end of the shank there is a socket 14. A cylindrical shaft 15 is rotatably mounted in the shank and can be rotated manually by means of a knob 16 mounted to one end of the shaft. The other end of the shaft forms a cylindrical portion 17, FIG 5, of smaller outside diameter than the shaft, which joins a portion 18 having external threads, a smooth end portion 19 of further reduced diameter joining the threaded portion 18, end portion 19 forming a guide pin at said other end of the shaft. Portions 18 and 19 are received in the portion of socket 14 projecting from the shank. The surgical instrument as described so far is in agreement with the instrument disclosed in PCT/SE95/00964 except that the end portion 14' of socket 14 is flattened from oppo-

site sides (cfr FIGS 1 and 2), so that the cross section of said end portion is non-circular.

**[0006]** The surgical instrument also includes an exchangeable and disposable needle 21 which at one end thereof is attached to the shank at one end of the needle and extends over substantially a quarter of a circle to the other, free end thereof in order to follow substantially the profile of the pubis between the vagina and the abdominal wall. The needle has uniform circular cross section and has a smooth, preferably polished outside surface. At the free end thereof the needle forms a point 22 by being terminated by a conical portion.

**[0007]** For attachment of needle 21 to shank 10 the needle forms at said one end thereof a straight portion 30 which is cylindrical but has milled flat faces 31 over that part of said portion 30, extending from the adjacent end of the needle, which shall be received by socket portion 14'. The needle should be oriented in a predetermined rotational position in relation to the shank, and more particularly it should project at right angles to the plane of handle 11. This rotational position is secured by the non-circular shape of socket portion 14' and the end portion of the needle having the flat faces 31, which fits into socket portion 14'. The end portion of the needle having the flat faces 31 joins the body of the needle over a conical portion 32, which tapers towards a shoulder 33.

**[0008]** An axial blind hole extends from the end surface of the needle said hole having a threaded portion 23 and inwardly thereof a narrower, cylindrical portion 24. Guide pin 19 is dimensioned to be guidingly received by said latter portion when the threaded portion 18 for attaching needle 21 to the rest of the surgical instrument is screwed into threaded portion 23 of the blind hole by rotating shaft 15 by manual rotation of knob 16, the end surfaces of the shank and the needle being pressed against each other. Also this attachment is in agreement with that described in PCT/SE95/00964.

**[0009]** When the method as described in PCT/SE95/00964 is practised two needles 21A and 21B, FIG. 6 of the embodiment described shall be connected one at each end of a tape 26. According to the present invention the tape of the preferred embodiment comprises a mesh or netting forming openings of the order of 1 mm. A suitable material for the tape is PROLENE®, a knitted polypropylene mesh having a thickness of 0,7 mm manufactured by Ethicon, Inc., Sommerville, New Jersey, USA. This material is approved by FDA in USA for implantation into the human body. The netting (tape) preferably has a width of approximately 10 mm and is enclosed in a thin polyethylene sheath 34 which in flattened condition has substantially the same width as the tape although a difference in width is shown in FIG 2 in order to make the provision of the sheath more clear. The length of the netting should be approximately 400 mm. The netting and the sheath are interconnected by means of two rows 35 of stitching. The end portion of the sheath is attached to the conical portion 32 of the needle

by means of a suitable strong glue, and the interconnection of the needle and sheath is covered by a shrink hose 36 of rubber which extends from the shoulder 33 over the conical portion 32 and partly over the cylindrical end portion 30 of the needle. The shrink hose is substantially flush with the surface of the needle at the shoulder. By this arrangement the netting is securely attached to the needle.

[0010] The purpose of sheath 34 is above all to facilitate the insertion of the netting in the manner described in PCT/SE95/00964 i.e. when the netting is pulled at the ends thereof from the vaginal wall to the abdominal skin and to avoid that rough edges of the netting irritate or damage the body tissues.

[0011] When the tape has been positioned in the correct position as a sling around the urethra the polyethylene sheath shall be removed, and in order to facilitate the removal the sheath should be perforated at the longitudinal center thereof as indicated by a dot-and-dash line 37 in FIG. 6, so that the two halves of the sheath can be withdrawn from the body by pulling at the respective outer ends thereof the halves being separated at the perforation under the influence of the pulling force.

[0012] The purpose of the polyethylene sheath is also to protect the netting during attachment to the needles and during handling before and during insertion into the body.

[0013] The longitudinal center of the tape and sheath should be indicated by a visible colour mark 38, FIG. 6 so that the surgeon readily can see when the netting is symmetrically located with reference to urethra during the surgery.

#### Claims

1. Surgical instrument for treating female urinary incontinence, comprising a shank (10) having a handle (11) at one end thereof, and two curved needle-like elements (21) which are each attached at one end thereof to one end of a tape (26) to be implanted into the body, and are constructed to be connected one at the time with the shank to form a curved portion at the other end end thereof each element being intended to be passed into the body via the anterior (suburethral) vaginal wall and being dimensioned to extend from the inside surface of the vaginal wall over the back of the pubic bone to the outside of the abdominal wall, **characterized in that** the tape comprises a netting (26) enclosed by a thin plastic sheath (34).
2. Instrument as in claim 1 **characterized in that** the netting (26) is made of polypropylene.
3. Instrument as in claim 2 **characterized in that** the sheath (34) is made of polyethylene.

4. Instrument as in any of claims 1 to 3 **characterized in that** the sheath (34) is perforated at the longitudinal center thereof.
5. Instrument as in any of claims 1 to 4 **characterized in that** the netting (26) and the sheath are interconnected by stitching ((35)).
6. Instrument as in any of claims 1 to 5 **characterized in that** the needle-like element (21) comprises a non-circular end portion fitting into a non-circular socket (14') at said other end of the shank (10).
7. Instrument as in claim 6 **characterized in that** said end portion of the needle-like element (21) joins the rest of the element by a conical portion (32) tapering towards a shoulder (33) on the needle-like element.
8. Instrument as in claim 7 **characterized in that** the netting (26) and the sheath (34) are connected to the needle-like element (21) by gluing to said conical portion (32).
9. Instrument as in claim 8 **characterized in that** the netting (26) and the sheath (34) at the site of attachment thereof are covered by a shrink hose (36).
10. Instrument as in claim 9 **characterized in that** one end of the shrink hose (36) abuts the shoulder (33) and is substantially flush with the surface of the needle-like element at said shoulder.
11. Instrument as in claim 9 or 11, **characterized in that** the netting (26) and the sheath (34) project from the shrink hose (36) at the other end thereof.
12. Instrument as in any of claims 1 to 11, **characterized in that** a visible marking (38) is provided on the sheath (34) at the longitudinal center thereof.

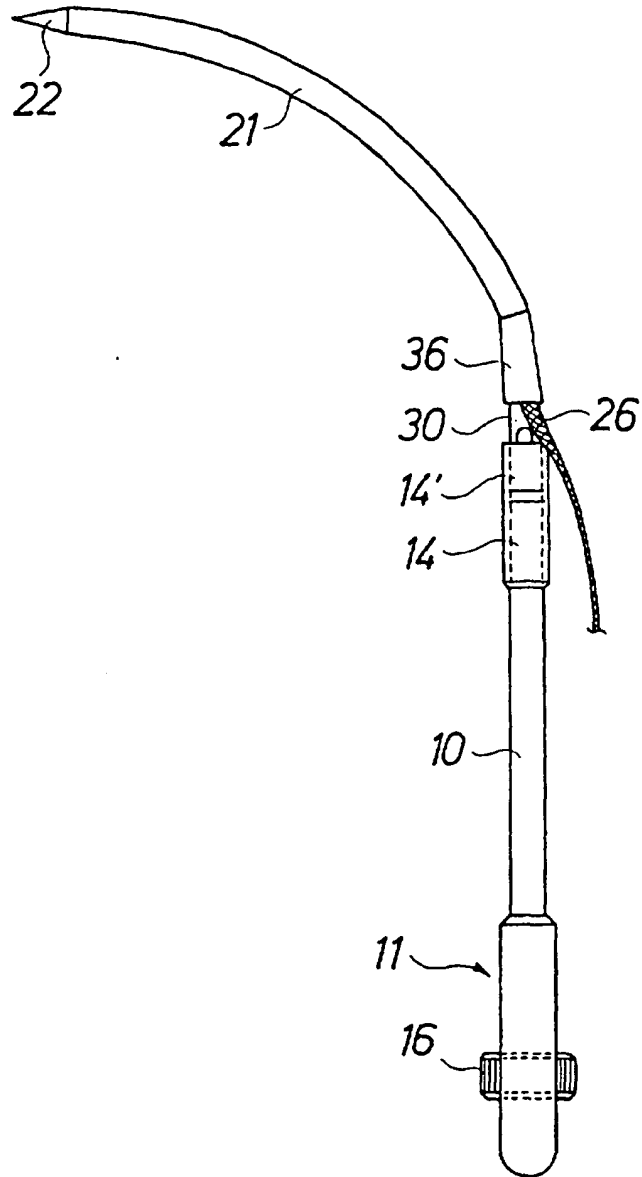


FIG. 1

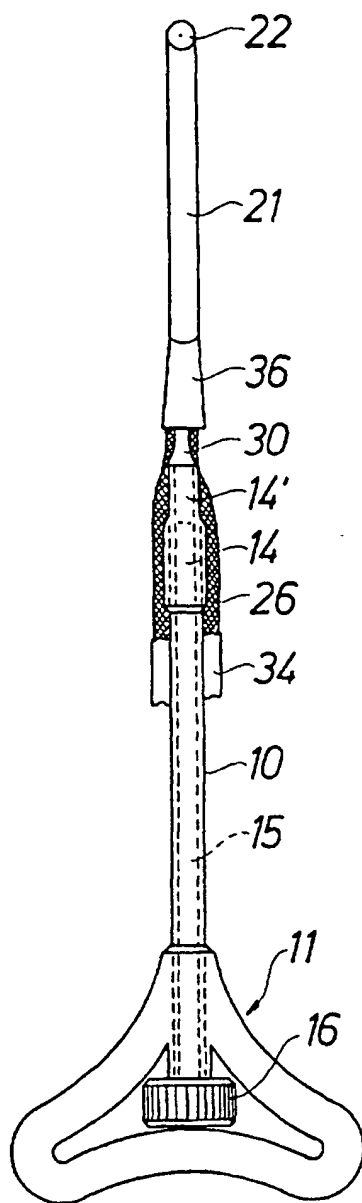


FIG. 2

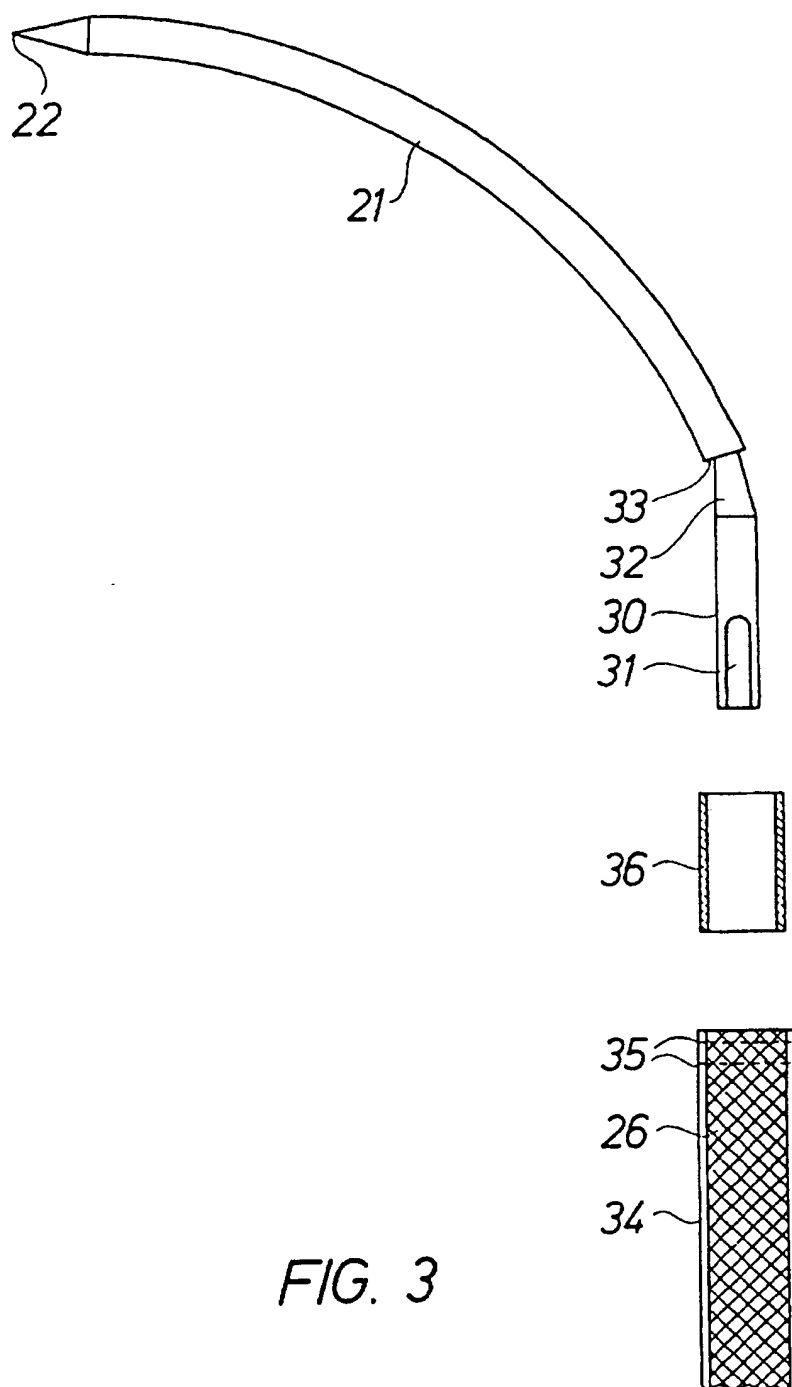


FIG. 3

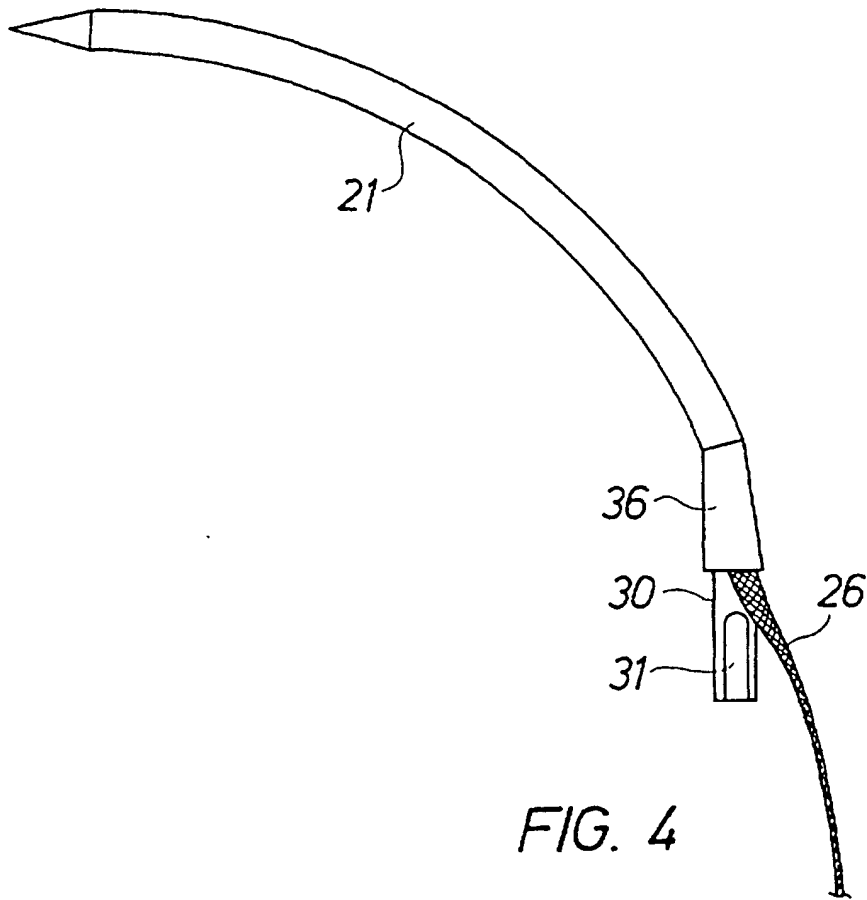


FIG. 4



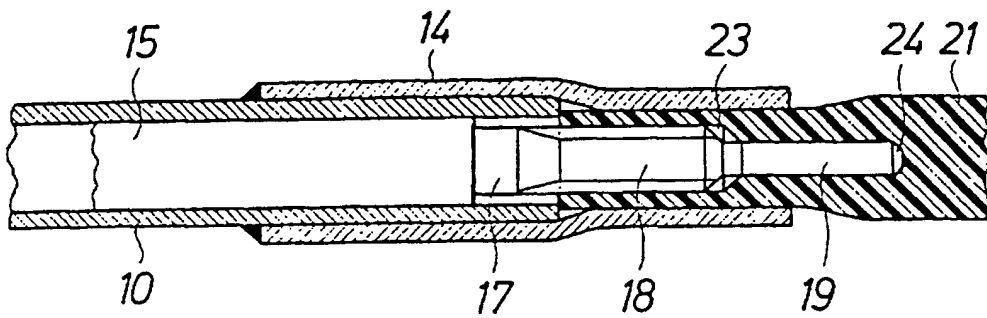


FIG. 5



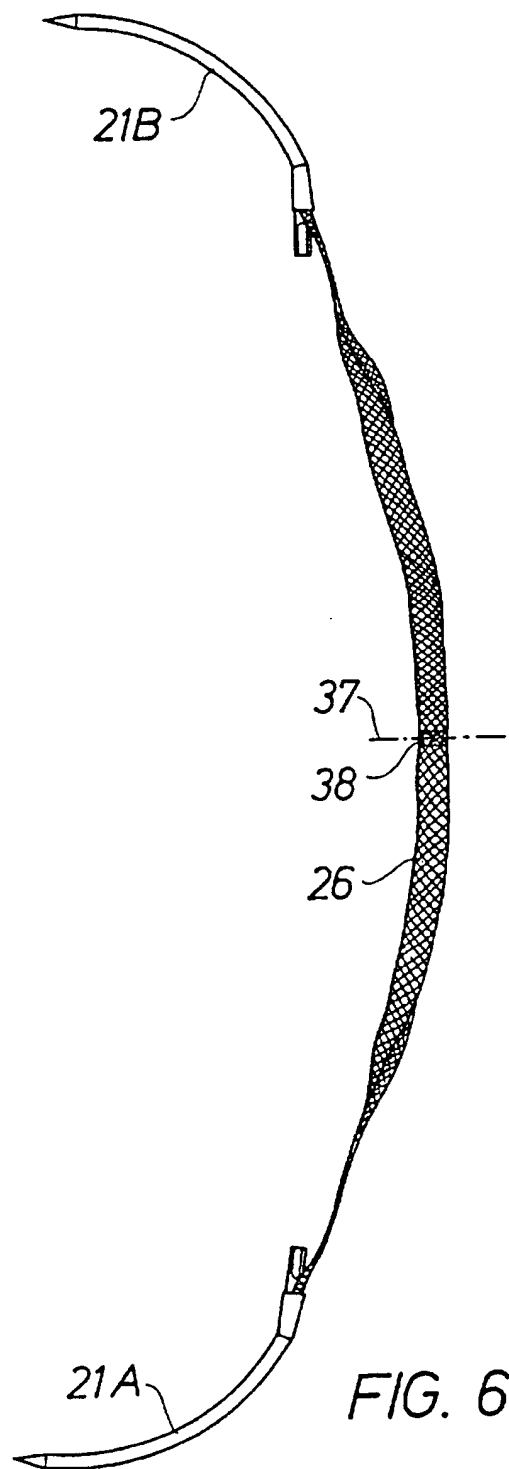



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 159 921 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
30.01.2002 Bulletin 2002/05

(51) Int Cl.<sup>7</sup>: **A61B 17/04**, A61B 17/06,  
A61F 2/00

(43) Date of publication A2:  
05.12.2001 Bulletin 2001/49

(21) Application number: **01203181.1**

(22) Date of filing: **08.10.1996**

(84) Designated Contracting States:  
**DE DK ES FI FR GB IT SE**

(71) Applicant: **ETHICON, INC.**  
Somerville, New Jersey 08876-0151 (US)

(30) Priority: **09.10.1995 SE 9503512**


(72) Inventor: **The designation of the inventor has not yet been filed**

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:  
**96935678.1 / 0 854 691**

(74) Representative: **Fisher, Adrian John et al**  
**CARPMAELS & RANSFORD 43 Bloomsbury**  
**Square**  
**London WC1A 2RA (GB)**

(54) **Surgical instrument for treating female urinary incontinence**

(57) A surgical instrument for treating female urinary incontinence comprises a shank (10) having a handle (11) at one end thereof, and two curved needle-like elements (21A, 21B) which can be connected one at the time with the shank at the other end thereof to form a curved end portion of the shank and are attached at one end thereof each with one end of a netting (26) which is intended to be implanted into the body and is covered by a thin plastic sheath (34).

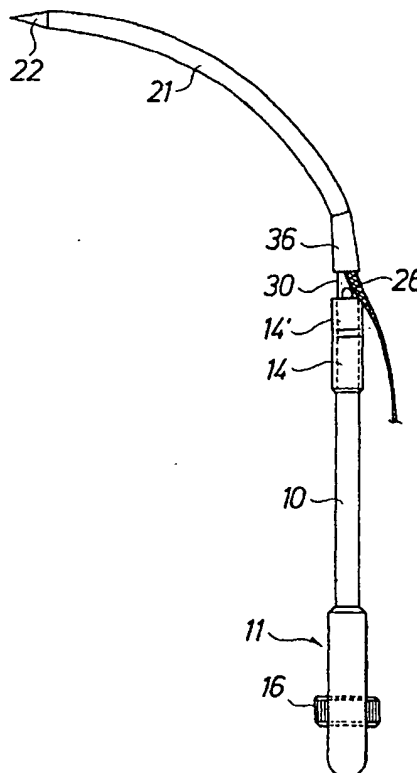

**FIG. 1**

**EP 1 159 921 A3**



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 20 3181

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
P,A	SE 503 271 C (MEDSCAND AB ;KB ULMUS (SE)) 29 April 1996 (1996-04-29) * the whole document *	1-12	A61B17/04 A61B17/06 A61F2/00
A	WO 90 03766 A (PETROS PETER EMANUEL) 19 April 1990 (1990-04-19) * abstract; figures 1-4 *	1-12	
A	DE 43 34 419 A (UNIV LUDWIGS ALBERT) 13 April 1995 (1995-04-13) * abstract; figures 1-4 *	1-12	
A	US 5 403 328 A (SHALLMAN RICHARD W) 4 April 1995 (1995-04-04) * abstract; figure 1 *	1	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			A61B A61F
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 10 December 2001	Examiner Hansen, S
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 20 3181

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

10-12-2001

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
SE 503271	C	29-04-1996	SE 503271 C2	29-04-1996
			AU 697010 B2	24-09-1998
			AU 3402495 A	22-03-1996
			CA 2198778 A1	07-03-1996
			DE 69519737 D1	01-02-2001
			DE 69519737 T2	19-04-2001
			DK 778749 T3	05-02-2001
			EP 0778749 A1	18-06-1997
			ES 2152423 T3	01-02-2001
			JP 10506803 T	07-07-1998
			SE 9402872 A	01-03-1996
			WO 9606567 A1	07-03-1996
			US 5899909 A	04-05-1999
WO 9003766	A	19-04-1990	AT 119758 T	15-04-1995
			AU 4406489 A	01-05-1990
			WO 9003766 A1	19-04-1990
			BR 8907704 A	30-07-1991
			DE 68921762 D1	20-04-1995
			DE 68921762 T2	03-08-1995
			EP 0437481 A1	24-07-1991
			US 5112344 A	12-05-1992
DE 4334419	A	13-04-1995	DE 4334419 A1	13-04-1995
US 5403328	A	04-04-1995	US 5662663 A	02-09-1997
			CA 2094685 A1	23-10-1993
			EP 0567130 A1	27-10-1993

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**